

## SPECIFICATION



**HDMI 2.0 AOC**

### Descriptions

Our HDMI Active Hybrid Cable is the most competitive long reach HDMI interconnection solution on the market. It supports HDMI Maximum Data Rate 6Gbps with light weight, flexible and ultra-small long-term bending radius (45mm) hybrid cable. With our advanced optical engine embedded. This HDMI Hybrid Cable provides full HDMI signal integrity, support up to 100m maximum length, plug and play. No external power required.

### Key Features

- ◆ Up to 100m Maximum Length. (Custom Length Available)
- ◆ Supports a wide range of resolutions up to 4K@60Hz (color space 4:4:4) 3D and Deep color
- ◆ Plug and Play
- ◆ Supports Multi-channel audio, Dolby True HD, DTS-HD Master Audio
- ◆ Compatible with HDMI 2.0 standard: EDID,CEC,HDCP (2.2), HDR (High Dynamic Range) , HEC,ARC etc.
- ◆ No loss of signal – delivering crystal clear digital images instantly.
- ◆ Reduced EMI and RFI
- ◆ Has high pulling strength and compression load
- ◆ Has Source & Display clearly printed on the connector for easy identification

- ◆ Support 18G super speed
- ◆ Hybrid optical cable with fiber and copper wire

### Applications

- ◆ Digital Signage
- ◆ LED signboards in streets and in stadiums
- ◆ Medical Imaging Equipment
- ◆ Airplane On-board Video System
- ◆ Home Theater
- ◆ Blue-ray, 3D video, Projector, Set-up box, DVR, Game Consoles and Computer
- ◆ TV Broadcast Station
- ◆ Conference Room Video Equipment
- ◆ Security systems

### Absolute Maximum Rating

Parameter	Symbol	Min	Max	Unit
Power Supply Voltage	VCC	4.5	5.5	V
Operating Temperature	Top	0	50	°C
Storage Temperature	Ts	-40	70	°C
Relative Humidity	Hs	10	80	%RH

### Recommended Operating Conditions


Parameter	Symbol	Min	Typical	Max	Unit
Power Supply Voltage	VCC	4.75	5.0	5.25	V
Operating Temperature	Top	0		50	°C

### Specifications

Item	Description	
	Transmitter (Source)	Receiver (Sink)
HDCP & DDC	HDCP 2.0 Fully Support bi-directional EDID and HDCP communication	
Video Bandwidth	6 Gbps/x3Channel (max)+ Clock.	
Supported Resolution & Distance	PC: WUXGA 1920 x 1200 up to 100 meters , HDTV : 480p, 720p, 1080i and 1080p deep color, 4K(60P), 3DFull HD 1920 x 1080 up to 100 meters	
O/E Converter	4 channel 850 nm VCSEL array	4 CH GaAs PD array

Connector Type	HDMI type A
Cable Type	Hybrid type with OM3 fiber and copper wire
Cable Length	15m/20m/30m/40m/50m/60m/70m/80m/90m/100m (with +/-30cm tolerance) Custom length available.
Cable Outer Diameter	4.5mm
Jacket Outer Material	PVC/TPU(Custom)
Cable Filler	Kevlar
Cable Weight	See packing details sheet
Cable Color	Black or custom
Differential Input	100 ohm (typ)
Power Consumption	250mW (max)
Power Supply	Non external power required

### HDMI Type A Pin Assignment

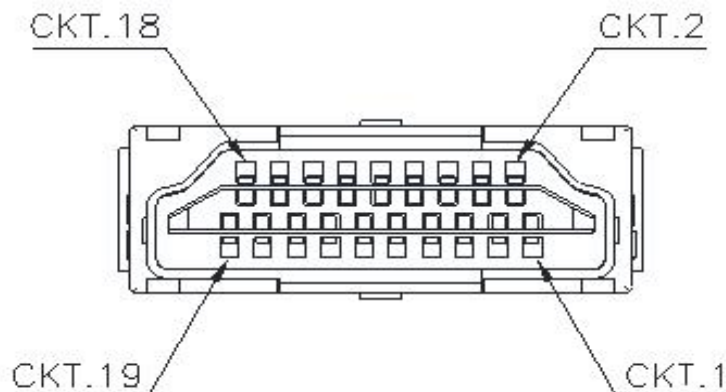


**HDMI Type A Connector Pin Assignment**

PIN	Function	PIN	Function
1	T.M.D.S. Data 2+	11	TMDS Clock Shield
2	T.M.D.S. Data 2 Shield	12	TMDS Clock-
3	T.M.D.S. Data 2-	13	CEC
4	T.M.D.S. Data 1+	14	Utility
5	T.M.D.S. Data 1 Shield	15	SCL
6	T.M.D.S. Data 1-	16	SDA
7	T.M.D.S. Data 0+	17	DDC/CEC Ground


8	T.M.D.S. Data 2 Shield	18	+5V Power
9	T.M.D.S. Data 0-	19	Hot Plug Detect
10	TMDS Clock+		

## Installation

To Source, ex. DVD, PC



To Sink, ex. TV



## Hybrid Cable Profile

